


ARTICULATING ARM

Sanyo Machine Works, Ltd.

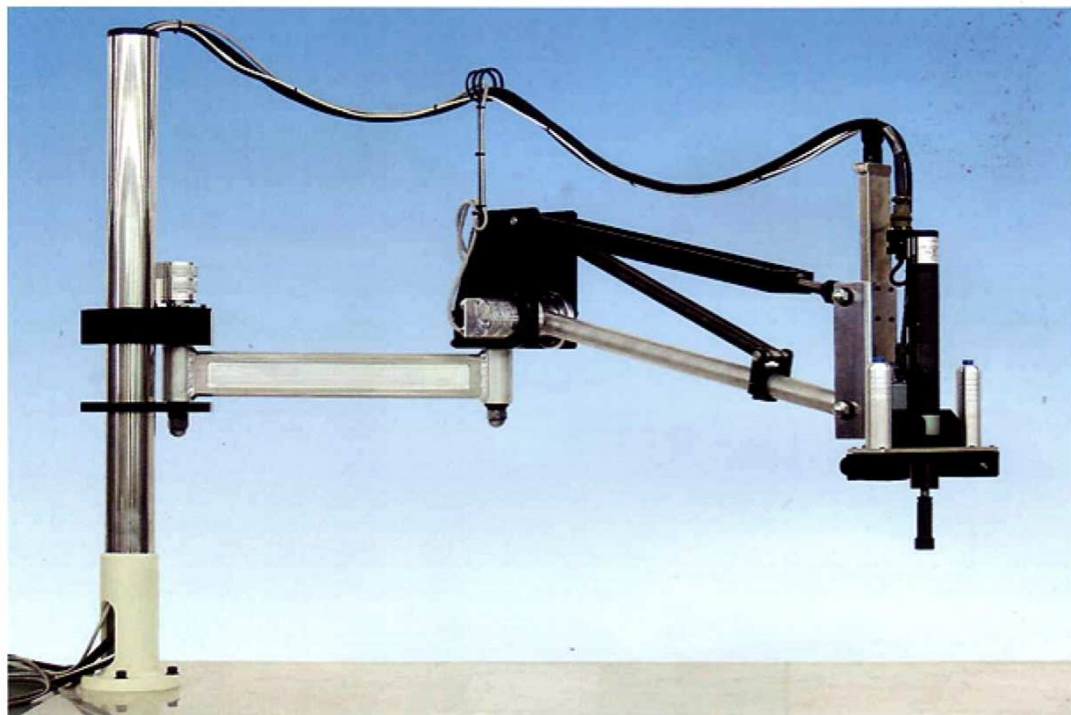

Easy Operation


Parallel link achieves light weight & high durability. No fastening reaction support needed. Ergonomic fully considered.

Position Detection

Position detection function allows pokayoke. ex) avoids fastening mistakes etc. Fastening parameter could automatically be changed per order and / or position.

Easy Install

Design is slim and doesn't require a big space. Install is just installing the post. Spring supports the weight and no air piping needed.

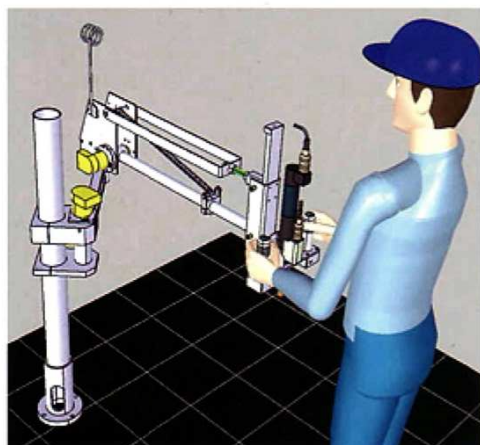

Main Specification

Item	Specification
Movable area	500mm × 350mm × 250mm
Outer dimension	250mm × 1,600mm × 1,000mm
Possible NR type (Fastening torque)	Rated Torque : 10Nm ~ 180Nm
Power supply	3 Phase AC200V 50Hz/60Hz
Model change	4 model (Possible to customize)
Position accuracy	±5.0mm
Position point	32 points/model (Possible to customize)