

POSITION ARM

Tightening Position Detection Function

Program Changing Function



Feature

- By install to SHDN Handheld Nutrunner, tightening reaction forces will be reduced a lot.
- Can be set the tightening position and sequence. Can be change tightening program
- Straight type of SHDN is available.
- By compact design, easy to install by is installed main pole.
- Up to 150Nm is available.
- By high spec encoder, it can be detect the position in details.
- Length of arm is maximum 1110mm or 1310mm.
- Liquid-crystal display (6inc) can show tightening position.


Specification

Model	Max. Torque (Nm)	L1 (mm)	L2 (mm)	Weight (kg)	Tool type	Number (*1)
SAH-(*1)S-0500A0500B-(*2)-(*3)	85	500	500	16	SHD-T1-005S	005
					SHD-T1-010S	010
SAH-(*1)S-0500A0700B-(*2)-(*3)	85	500	700	17	SHD-T2-030S	030
					SHD-T2-050S	050
					SHD-T2-085S	085
SAH-(*1)S-0600A0600B-(*2)-(*3)	150	600	600	39	SHD-T2-150S	150


*1 Model name is changed according to the using tool type.

*2 R is right hand, E is left hand. *3 E is the arm with encoder.

Dimensions

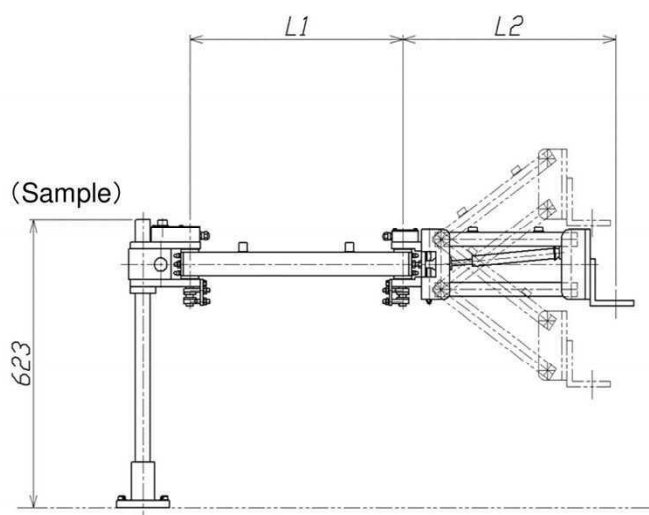

Right hand type sample

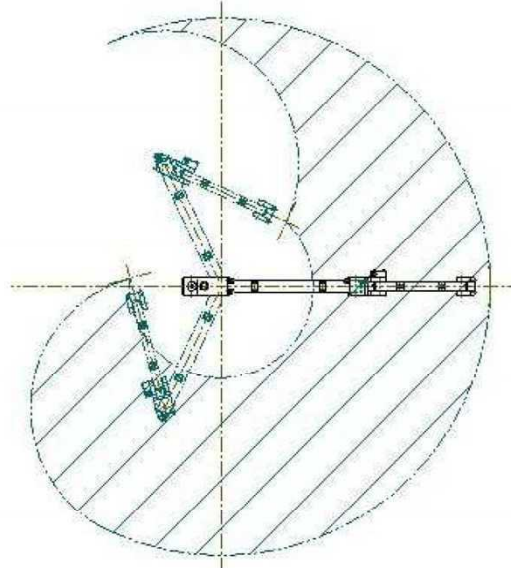

* The above-mentioned specification may be changed without prior notice.



SANYO MACHINE WORKS, LTD.

SANYO MACHINE WORKS, LTD.
 No.1 Oka, Okimura, Kitanagoya, Aichi, Japan
 TEL:0568-21-1111 Fax:0568-23-4711
 E-MAIL:sales@sanyo-machine.co.jp
 Internet home page URL <http://www.sanyo-machine.co.jp>

SANYO MACHINE AMERICA CORPORATION
 950 S.Rochester Rd., Rochester Hills, Michigan 48307
 TEL:248-651-5911 Fax:248-651-5915
 E-MAIL:sales@sanyo-machine.com
 Internet home page URL <http://www.sanyo-machine.com>

SANYO CANADIAN MACHINE WORKS, INC
 33 Industrial Drive, Elmira, Ontario, Canada N3B 3B1
 TEL:519-669-1591 Fax:519-669-5346
 E-MAIL:sales@sanyo-machine.on.ca

